


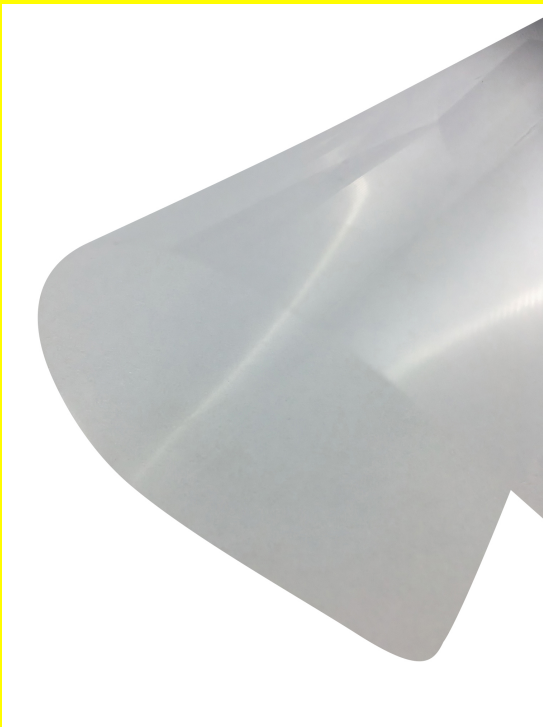

HS maxilux 200 ANTIFIRE

Highly transparent film for architectural application Material: 100% ETFE (Ethylene tetrafluoroethylene) Flame retardancy: in conformity with DIN4201-B1 / DIN EN 13 501-1 (Bs1d0) Thickness: 0.20mm Weight: ca.360 g/m² Standard width: 2.0m

[Read More](#)

SKU: 2627


Price:

Stock: instock

Categories: [Films](#), [HS² Weather Protection](#)

Tags: [Film](#), [maxilux](#)

Product Description

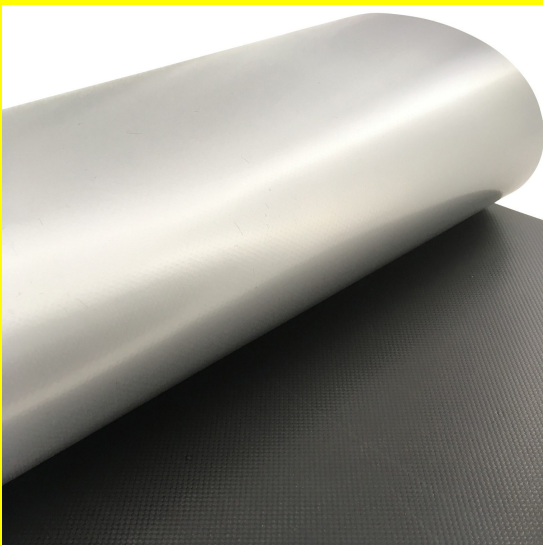

HSX ANTIFIRE series

Film for weather protection (HS² installation), side or roof roll up Material: base 100% polyester/ coating PVC Flame retardancy: in conformity with DIN EN 13501-1 (Bs2,d0) Standard width: 3.0m

[Read More](#)

SKU: 2613/ 2618

Price:

Stock: instock

Categories: [Blackout](#), [Films](#), [HS² Weather Protection](#)

Tags: [Film](#), [maxilux](#)

Product Description